




ECO SELECT

Eco Select permits to decrease energyconsumption and increase running time by 20% in every day cleaningoperations.Noise level is down to 62Db allowing cleaning operations even in sensitive areas. Programmed maintenance is longer with consequent cost reduction.



Maintenance Costs

SAVE UP TO 20%

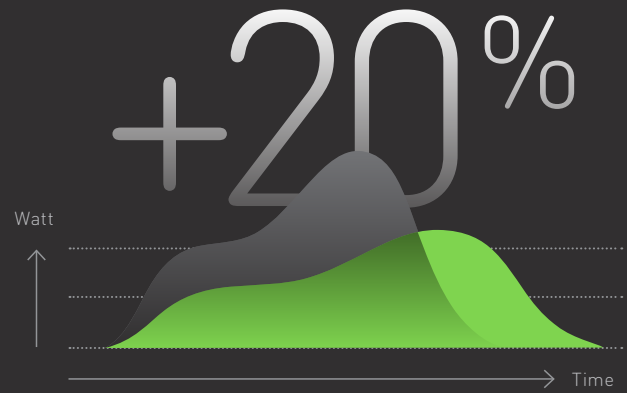

SLS™ SELF LEVELING SYSTEM

MECHANICAL SYSTEM



- The brush pressure with self-leveling and self-adjusting head allows a perfect fit between the brush and floor
- System available as mechanical, electro mechanical or electronic according to machine models



FOLDABLE HANDLE

The adjustable multi-position handle on CT45 allows many applications with maximum comfort to the operator, even in narrow areas.



Handle Adjustment Angle

180°



CT45



.01

REMOVABLE TANK

High density polyethylene tanks.
Metal chassis with anti-corrosion treatment.

.02

HANDLE
Different position adjustment.

.03

MOTORS

Brush motor with oil bath reduction gear box. Three-stage suction motor.

.04

BATTERIES AND CHARGERS

Other Features

- Brush replacement without tools
- Squeegee blades can be used on four sides before needing replacements
- Easy access to internal compartments
- Tanks and surrounding body in high density polyethylene
- Oil bath reduction gear box
- Brush head and squeegee system designed to absorb harsh impact
- Panel control switches protected against water and humidity
- Central Flow System
- Great maneuverability due to optimum weight distribution

CT45 TECHNICAL SPECIFICATIONS

CT45 BRUSH DRIVE

Code		CT45
PRODUCTIVITY		
Max theoretical productivity	ft ² /h - m ²	17,000/ 1,750 m ²
Cleaning path	in/mm	20 in/ 500 mm
Squeegee width	in/mm	28 in/ 700 mm
Water tank capacity	Gal/ l	11/12 gal/ 40/45 l
Max running time	min	120
Voltage	V-Ah	24V (2x12) AGM
Installed power	W	550
Max Speed		2.2 mph/ 3.5 kph
Brush pressure	lbs/ kg	55 lbs/ 25 kg
Weight	lbs/ kg	243 lb/ 110 kg
Dimensions	in	33 x 22 x 48 in

AVAILABLE ACCESSORIES

PAD DRIVER
SPPV01335



SOFT POLYPROPYLENE BRUSH
SPPV01332



TYNEX BRUSH
SPPV01492



SOFT NATURAL BRISTLE BRUSH
SPPV01495



12 V 84 AGM
12V84-AGM



SQUEEGEES
PMVR01534 (COMPLETE)
MPVR06287 (FRONT)
MPVR06288 (REAR)



GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft ² / h	Maximum Theoretical ft ² /h	Ft ² charge efficiency (70%)
CT45B50	Brush drive, 12v84 AGM Battery	2.0 h	16,811	33,623	23,536



IPC Eagle Corporation
12450 Oliver Ave S Burnsville, MN 55337

800-486-2775
info@ipceagle.com