



AUTOMATIC SCRUBBERS - WALK BEHIND

CT30

The CT30 is a compact machine with high productivity. With its 18 in cleaning path, it can clean up to 15,000 square feet an hour and still have the ability to reach into tight, congested spaces.

MAX PRODUCTIVITY

15,000 ft²/h

BATTERIES
RUNNING TIME

2.0 h

KEY SPECS

8/9 gal

18" brush drive

MOST FREQUENT USE



FOLDABLE HANDLE



SPIN-ON, SPIN-OFF BRUSH



EASY TO USE CONTROLS



INNOVATIONS






ECO SELECT



Maintenance Costs

SAVE UP TO 20%

+20%

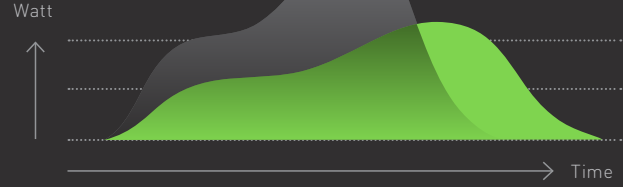

Eco Select permits to decrease energy consumption and increase running time by 20% in every day cleaning operations. Noise level is down to 62Db allowing cleaning operations even in sensitive areas. Programmed maintenance is longer with consequent cost reduction.



SLS™ SELF LEVELING SYSTEM

MECHANICAL SYSTEM



- The brush pressure with self-leveling and self-adjusting head allows a perfect fit between the brush and floor
- System available as mechanical, electro mechanical or electronic according to machine models



FOLDABLE HANDLE



Handle Adjustment Angle

180°

The adjustable multi-position handle on CT30 allows many applications with maximum comfort to the operator, even in narrow areas.



CT30

ADJUSTABLE HANDLE

.01

.02

REMOVABLE TANK

High density polyethylene tanks.
Metal chassis with anti-corrosion treatment.

.03

MOTORS

Brush motor with oil bath reduction gear box.
Three-stage suction motor.

.04

BATTERIES AND CHARGERS



Other Features

- Brush replacement without tools
- Squeegee blades can be used on four sides before needing replacements
- Easy access to internal compartments
- Tanks and surrounding body in high density polyethylene
- Oil bath reduction gear box
- Brush head and squeegee system designed to absorb harsh impact
- Panel control switches protected against water and humidity
- Central Flow System
- Great maneuverability due to optimum weight distribution

CT30 TECHNICAL SPECIFICATIONS

CT30 BATTERY BRUSH DRIVE

Code	CT30B	
PRODUCTIVITY		
Max theoretical productivity	ft ² /h - m ²	15,000/ 1,670 m ²
Squeegee width	in/mm	22 in/ 450 mm
Cleaning path	in/mm	18 in/ 450 mm
Water tank capacity	Gal/ l	8/9 gal/ 28/30 l
Max running time	min	120
Voltage	V-Ah	24V (2x12) AGM
Installed power	W	550
Max Speed		2.2 mph/ 3.5 kph
Brush pressure	lbs/ kg	46 lbs/ 21 kg
Weight	lbs/ kg	205 lbs/ 93 kg
Dimensions	in	38 x 22 x 48 in

AVAILABLE ACCESSORIES

PAD DRIVER
SPPV01306



SOFT NYLON BRUSH
SPPV01188



TYNEX BRUSH
SPPV01487



SOFT NATURAL BRISTLE BRUSH
SPPV01490



12 V 84 AGM
12V84-AGM



SQUEEGEES
PMVR01986 (COMPLETE)
MPVR05953 (FRONT)
MPVR05954 (REAR)



GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft ² / h	Maximum Theoretical ft ² /charge	Ft ² charge efficiency (70%)
CT30B45	Brush drive, 12v84 AGM Battery	2.0 h	15,130	30,260	21,182



IPC Eagle Corporation
12450 Oliver Ave S Burnsville, MN 55337

800-486-2775
info@ipceagle.com